


## Ultraline® Dyneema® 8 strand core

### CONSTRUCTION

Ropes of the ULTRALINE® range are of a circular braid design and they have been developed to give a rope extra protection against wear and tear without significantly changing the primary characteristics. It is a logical development from the double-braid, where the outer braid both protects the inner braid and contributes to the strength. In the circular braid design this duality has been abandoned. The cover is optimised for wear and abrasion resistance and the core(s) are optimised for strength. This results in both a higher strength and a better design life.



In this design a plaited core is used. It is recommended for applications where high tensile and bending forces are combined. The rope is slightly knobby and torque balanced.


### MATERIAL PROPERTIES

Polyethylene is an amorphous plastic with relatively low tensile strength. Through gel spinning the crystals achieves a maximum orientation, this give the material a high strength and stiffness. And it is commonly known as **H**igh **M**odulus **P**oly**E**thylene. It has an extremely low coefficient of friction and is extremely resistant to abrasion. The thermal properties of HMPE are comparable to ordinary Polyethylene. HPME is also prone to cold flow and therefore has a high creep rate.

### FEATURES

- Material: HMPE (high modulus polyethylene)  
Dyneema® SK75
- Construction: load-bearing cores with a cover of composite yarn
- Treatment: On request
- Colour of Rope: White
- Approx. Spec. Density: 0,975 floating
- Melting Point: 145° C
- Abrasion Resistance: Excellent
- U.V.resistance: Excellent, due to jacket
- Temperature resistance: 70° C max continuous
- Chemical resistance: Excellent
- Dry & wet conditions: Wet strength equals dry strength
- Range of use: towing, salvage, mooring, installation

Dia	Circ.	Min Break Load		Weight	
		tf	kN	kg/100m	kg/coil
22	2 3/4	38,4	376	30,1	66
24	3	45,5	446	34,9	77
26	3 1/4	53,2	522	40,0	88
28	3 1/2	53,7	527	44,2	97
30	3 3/4	60,7	595	49,1	108
32	4	75,1	737	58,2	128
36	4 1/2	97,6	957	72,9	160
40	5	112	1103	88	194
44	5 1/2	143	1398	108	237
48	6	173	1692	127	280
52	6 1/2	202	1985	146	322
56	7	240	2354	170	374
60	7 1/2	274	2688	194	426
64	8	306	3002	225	495
68	8 1/2	345	3381	253	557
72	9	383	3753	281	619
76	9 1/2	399	3911	309	679
80	10	436	4272	337	742
88	11	528	5177	408	897
96	12	597	5861	486	1069
104	13	705	6913	571	1255

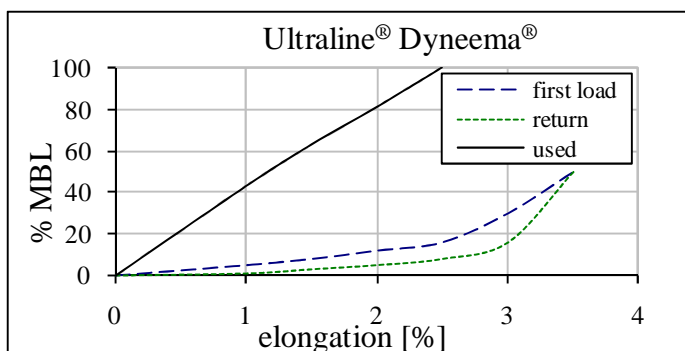

Coil length: 220m  
Spliced strength: ± 10% lower  
Weight and length tolerance: ± 5%  
Diameter: ± 2%

MBL = Minimum Breaking Load conform ISO 2307  
Other sizes available upon request

The information disclosed herein was originated by and is the property of BEXCO nv and its subsidiaries. BEXCO nv and its subsidiaries reserves all intellectual and industrial property rights such as any and all patent, trademark, design, manufacturing, reproduction use and sales rights thereto and to any article disclosed therein, except to the extent rights expressly granted to others.